



FERCO SEATING ILLUSTRATION ONLY

Product Specifications

Structure

- Combination of a wooden panel frame and a steel frame, covered with foam then, upholstered in leatherette / leather / fabric.

Backrest and Seat

- Inner ply is made of 15 mm thick press curved plywood, covered with foam of 110-155mm thickness and upholstered in leatherette / leather / fabric.
- Seat unit with 18mm compressed plywood fully covered with high resilience foam of 115 - 140mm thickness and upholstered in leatherette / leather / fabric.

Panel

- Wooden panel covered with foam, upholstered in leatherette / leather / fabric and a built-in cup holder.

Recliner Mechanism

- Electrically single-motor operated.
- In compliance with EMC 2014/30/EU & LVD 2014/35/EU.
- Auto-return function.
- Push force (min. to max.) : 750N – 4000N.
- Pull force (min to max.) : 750N – 4000N.
- Includes adapter (input) : 110V~240V (output) : DC 29V, 1.8A).
- Operating temperature : 0° - 40 °C.

Metal Finishing

- Zigzag lever systems that ensure the backrest and footrest are being operated smoothly.
- All metal parts exposed shall be stripped and cleaned with iron phosphate, hot water rinsed and then chromic acid rinsed.
- All metal parts are coated with an epoxy finish minimum of 60 microns for outdoor use.

Upholstery Finishing

- Refer Ferco standard fabrics / leatherette / leather chart.

Fire Resistance



- Fire Safety - Flammability compliance with California Bulletin 117 and international regulations in their last issues and particularly with safety regulations.
- Flammability compliance with BS 5852 : 2006 Section 3 Ignition Source 0 & 1.

Warranty

- Refer to Ferco product warranty.

Options

- Swivel table A
- Swivel table B
- Double action swivel table
- Dual USB charging port
- Auto return
- Embroidery logo
- Embroidery seat numbering
- Square light row lettering & numbering (80 x 80mm)
- Puck light
- Fixed backrest
- ¾ laminated outer back
- Headrest upholstered with leather
- Twin seat
- Call button
- Cleaning switch
- Flammability compliance with BS 5852 : 2006 Section 3 Ignition Source 5

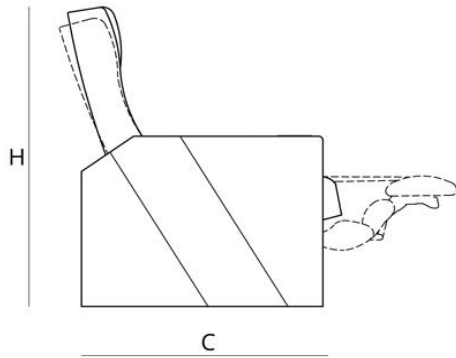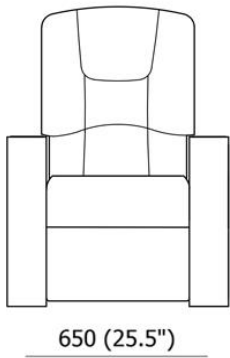

DIMENSIONS	
H	C
1100 (43.5")	880 (34.5")