



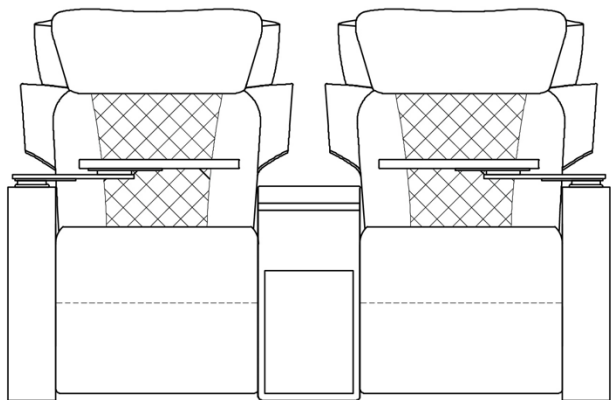

1770 (69.5")

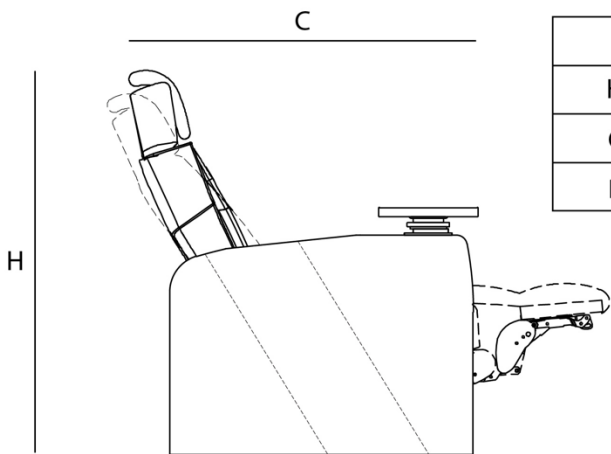

H

D

DIMENSIONS	
H	1080 (42.5")
C	970 (38")
D	1420 (56")



FERCO SEATING ILLUSTRATION ONLY

Product Specifications

Structure

- Combination of a wooden frame and a steel frame, upholstered with polyurethane HR foam and polyester then, covered with fabric / leatherette / leather.

Backrest and Seat

- Inner back frame is made of wooden frame upholstered with polyurethane then, covered with fabric / leather / leatherette.
- Seat unit with wood fully upholstered with polyurethane then, covered with fabric / leather / leatherette.

Recliner Mechanism

- Electrically single-motor operated.
- Auto-return function.
- Push force (min. to max.) : 750N – 6000N.
- Pull force (min. to max.) : 750N – 4000N.
- includes adapter (input) : 110V~240V). (output) : DC 29V, 1.8A).
- Operating temperature : 0° - 40 °C.

Metal Finishing

- Zigzag lever systems that ensure the backrest and footrest being operated smoothly and silent proof.
- All metal parts exposed shall be stripped and cleaned with iron phosphate, hot water rinsed and then chromic acid rinsed.
- All metal parts are coated with an epoxy finish minimum of 60 microns for outdoor

Fabric

- Refer Ferco Standard Fabrics Catalogue (Grade: A)

Safety

- Flammability compliance with California Bulletin 117 and international regulations in their last issues and particularly with safety regulations.
- Finger Proof - Recliners are attached with finger guard to reduce hazard.

Warranty

- Refer to Ferco product warranty.

Options

- In-seat lighting
- Aisle light and row lettering
- Oval row lettering
- Square Seat Numbering & Row Lettering
- Swivel Table / Smart Swivel Table / Double Action Swivel Table
- Embroidery seat numbering on backrest
- Logo embroidery
- USB Charging Point
- Easy Lift
- Call System Button
- Enclosure Panel
- Bottom Fridge compartment/double tier compartment/single tier compartment on center panel