




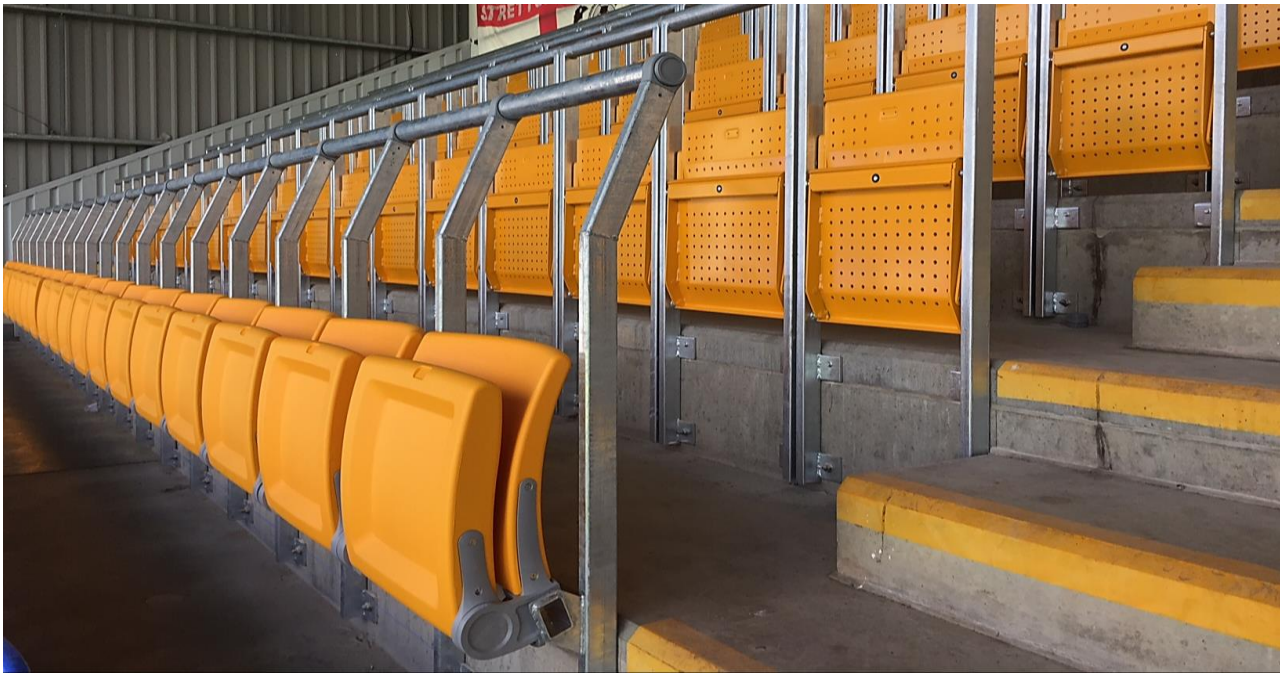

SHREWSBURY TOWN FC, UK



495 (19.5") Min.

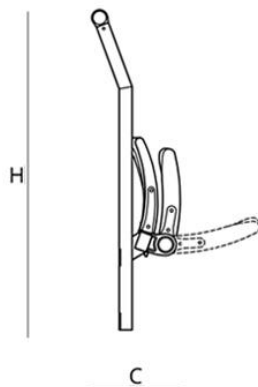

DIMENSIONS	
H	C
1270 (50")	345 (13.5")

Product Specifications

- Structure

 - Mild steel railing with Ø50mm x 2.8mm thickness.
 - Mild steel upright section with 50x25x2.8mm thickness.
 - BS 3692 Specification for ISO metric precision hexagon bolts, screws and nuts. Metric Units.
 - BS EN 12727: 2000 Specification for strength and durability.
- Backrest and Seat

 - Blow moulded co-polymer.
 - UV Inhibitors are added at a rate to ensure no significant colour or plastic deterioration.
 - Bracket mounted tip-up seat with ergonomically design back and seat.
- Metal Finishing

 - All metal parts exposed shall be stripped and cleaned with iron phosphate, hot water rinsed and then chromic acid rinsed.
 - All metal parts are coated with an epoxy finish of at least 60 microns for indoor use and hot dipped galvanized to BS 729 for outdoor use.
 - Conformity with BS-6496 hardness test.
- Plastic

 - Refer to Ferco plastic color chart.
- Advantages

 - Comfort especially studied according to fundamental criteria of ergonomic.
 - Durability of the chair & after sales service for all spare parts of the model.
 - Slim profile creating enhance seat way.
 - Curved backrest design for maximum comfort.
 - Flexibility of seats by using the steel beam clamp for easy installation & maintenance.
- Fire Resistance

 - Flammability compliance with California Bulletin 117 and international regulations. in their last issues and particularly with safety regulations.
- Warranty

 - Refer to Ferco product warranty.
- Options

 - ARC Row lettering on end cap
 - ARC Seat numbering