




TELFORD, UK

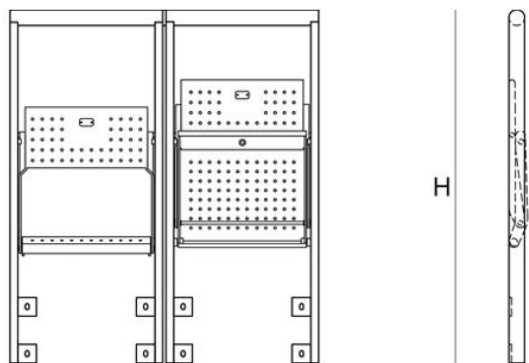

460 (18") Min.

C

DIMENSIONS	
H	C
1030 (40.5")	60 (2.5")

Product Specifications

Structure

- Mild steel railing with Ø50mm x 2.8mm thickness.
- Mild steel upright section with 50x25x2.8mm thickness.
- BS 3692 Specification for ISO metric precision hexagon bolts, screws and nuts. Metric Units.
- BS EN 12727: 2000 Specification for strength and durability.

Backrest and Seat

- Backrest made of mild steel sheet of 2.8mm thickness. Connected to Lockable seat made of Mild steel sheet with 2.8mm thickness.

Metal Finishing

- All metal parts exposed shall be stripped and cleaned with iron phosphate, hot water rinsed and then chromic acid rinsed.
- All metal parts are coated with an epoxy finish of at least 60 microns for indoor use and hot dipped galvanized to BS 729 for outdoor use.
- Conformity with BS-6496 hardness test.

Plastic

- Refer to Ferco plastic color chart.

Advantages

- Comfort especially studied according to fundamental criteria of ergonomic.
- Durability of the chair & after sales service for all spare parts of the model.
- Slim profile creating enhance seat way.
- Angled backrest design for maximum comfort.
- Modular assembly of seats by using the plastic connectors for easy installation & maintenance.

Fire Resistance

- Flammability compliance with California Bulletin 117 and international regulations. in their last issues and particularly with safety régulations.

Warranty

- Refer to Ferco product warranty.

Options

- Aluminium row lettering on upright section
- Aluminium seat numbering