




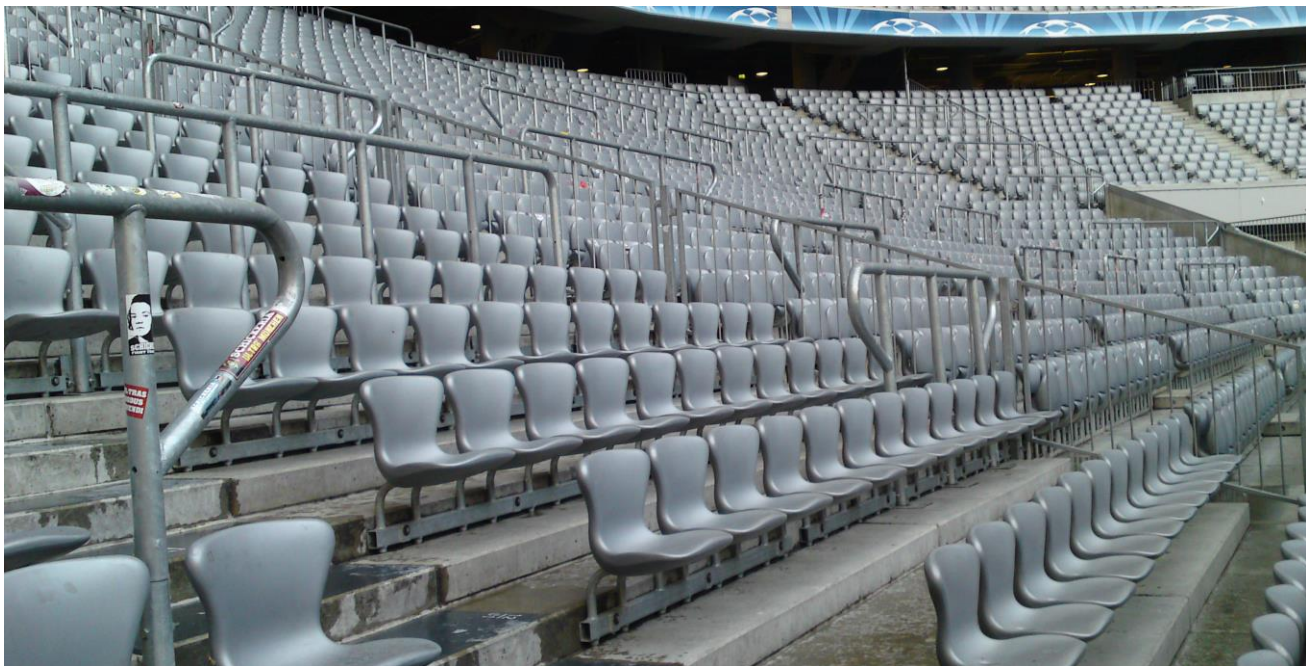

MUNCHEN ALLIANZ ARENA, GERMANY



460 (18") Min.



DIMENSIONS	
H	C
730 (29")	405 (16")

Product Specifications

Backrest and Seat

- The seat and backrest are made of blow moulded high impact co-polymer with double wall.
- Polypropylene.
- Flame retardant with U.V inhibitors.
- Built-in U.V inhibitors ensure no significant colour or plastic deterioration for a period of five years (BS ENISO 4892 – Specification for U.V Stabilization).
- Individual of 2 piece high quality tip-up seat, designed according to fundamental criteria of ergonomic comfort for arena, auditorium and sports venue seat with seat lifting to an upright uniform position when not occupied.

Metal Finishing

- All metal parts exposed shall be stripped and cleaned with iron phosphate, hot water rinsed and then chromic acid rinsed.
- All metal parts are coated with an epoxy finish of at least 60 microns for indoor use and hot dipped galvanized to BS 729 for outdoor use.
- Conformity with BS-6496 hardness test.

Plastic

- Refer to Ferco plastic color chart.

Advantages

- Comfort especially studied according to fundamental criteria of ergonomic.
- Durability of the chair & after sales service for all spare parts of the model.
- Curved backrest design for maximum comfort.

Fire Resistance

- Fire Safety - Flammability compliance with California Bulletin 117 and international regulations in their last issues and particularly with safety regulations.
- Flammability compliance with BS 5852 : 2006 Section 3 Ignition Source 0 & 1.

Warranty

- Refer to Ferco product warranty.

Options

- FCB-S seat numbering
- Power point provision
- Riser mounted
- Tier mounted
- Beam mounted leg
- Ultra Violet and Fire retardant
- Flammability compliance with BS 5852 : 2006 Section 3 Ignition Source 5