



510 (20") 535 (21")
560 (22") 585 (23")
610 (24")



C

DIMENSIONS		
P°	H	C
16°	990 (39")	540 (21.5")
20°	980 (38.5")	585 (23")

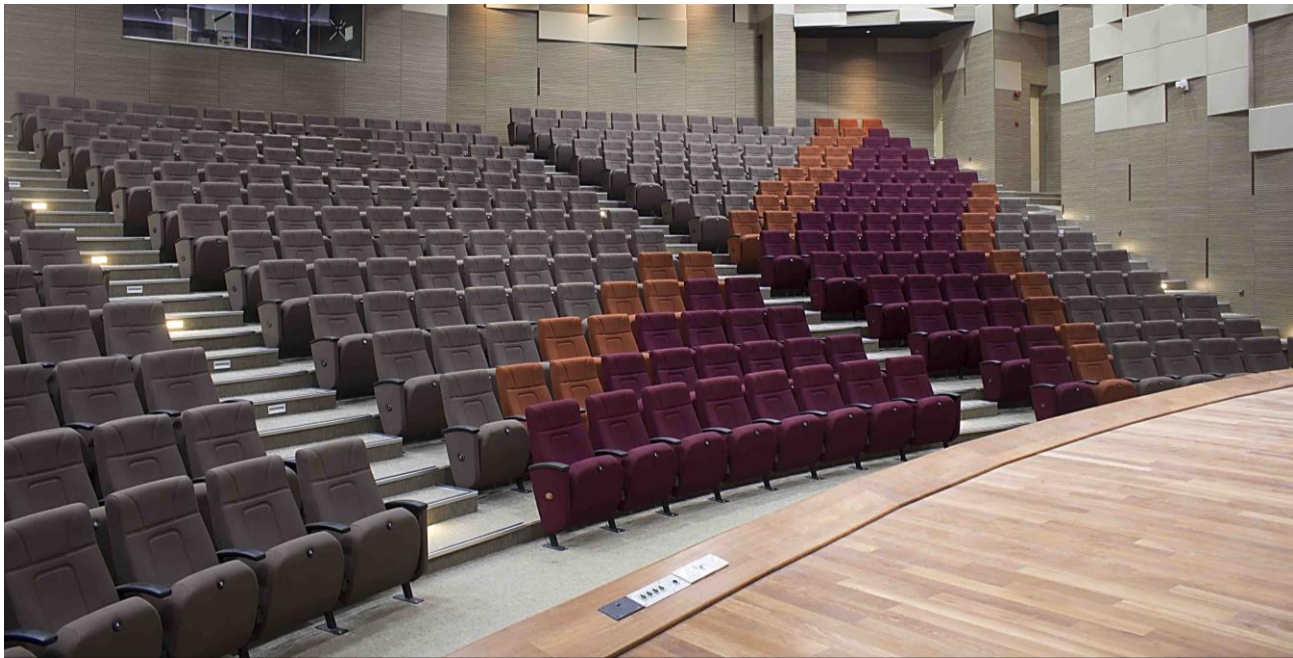

TAYLORS INTERNATIONAL SCHOOL PUCHONG, MALAYSIA

Product Specifications

Backrest

- Inner panel is made of 13 mm thick press curved plywood, covered with polyurethane high resilience foam of 75-100mm thickness, density 45kg/m³ with fabric covers.
- Fully upholstered outer back.

Seat

- Rectangular shape, tapered front end, tip-up.
- Inner structure made of Ø21mm x Thk. 2mm tubular steel frame with grid foundation, integrated in high resilience foam, density 60kg/m³.
- Upholstered with padded cover.
- Tip- up seat with counterweight systems and being lift-up by means of gravity. Totally silent and maintenance free.

Armrest, Panel & Leg

- Fixed, shared armrest with a curved design.
- Top part made of black polyurethane.
- Decorative aisle panel made of MDF board and upholstered with padded covers.

Metal Finishing

- All metal parts exposed shall be stripped and cleaned with iron phosphate, hot water rinsed and then chromic acid rinsed.
- All metal parts are coated with an epoxy finish of at least 60 microns for indoor use.
- Conformity with BS-6496 hardness test.

Standards

- Centre and end standards are of lateral pedestal design made of 38mm x 38mm x Thk 2.3mm square hollow section continuous welded to a 6 mm thickness steel plate.

Upholstery Material

- Refer to Ferco standard fabric / leatherette / leather charts.

Advantages

- Comfort especially studied according to fundamental criteria of ergonomic.
- Durability of the chair & after sales service for all spare parts of the model.
- Large choice of fabrics.

Fire Safety

- Fire Safety - Flammability compliance with California Bulletin 117 and international regulations in their last issues and particularly with safety regulations.
- Flammability compliance with BS 5852 : 2006 Section 3 Ignition Source 0 & 1.

Warranty

- Refer to Ferco product warranty.

Options

- Row lettering type A
- Row lettering type E with Aisle light
- Aluminium round row lettering
- Round seat numbering
- Embroidery logo
- Embroidery seat numbering
- Tandem removable leg
- Free sanding leg
- Castor wheel
- A.D.A Panel
- CTA tablet
- Wrimatic lite
- Plastic outer back
- Wooden outer back / seat outer
- Wooden / upholstered armrest
- Wooden panel
- ProBax
- Flammability compliance with BS 5852 : 2006 Section 3 Ignition Source 5