



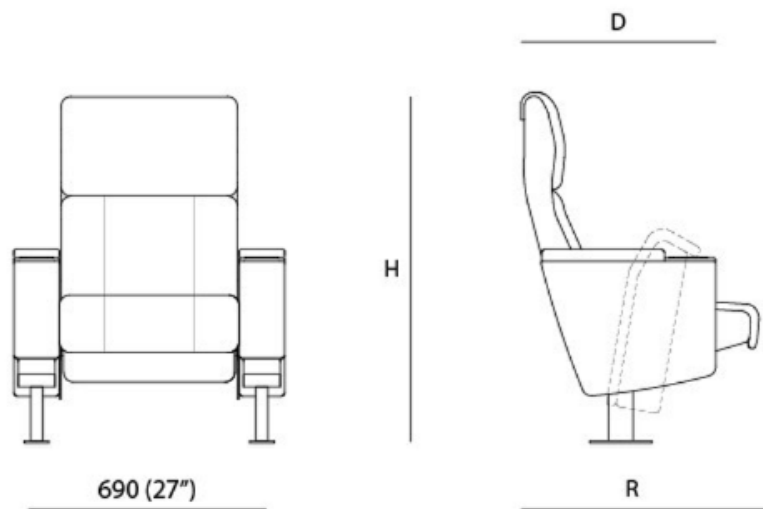

DIMENSIONS	
H	1070 (42")
D	600 (23.5")
R	770 (30")

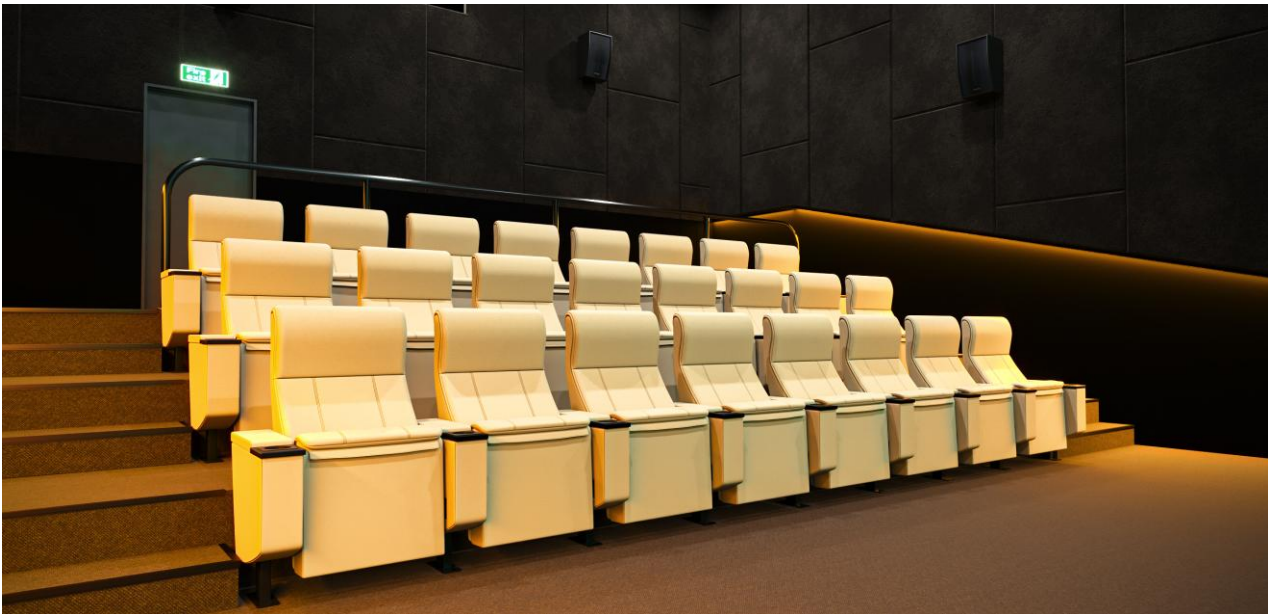

FECO SEATING ILLUSTRATION ONLY

Product Specifications

Backrest

- Inner ply is made of 15 mm thick press curved plywood, upholstered with High Resilience Foam of 85-130mm thickness and covered with leatherette / leather / fabric.

Seat

- Inner structure made of Ø21mm x Thk. 2.6mm and Ø27mm x Thk. 2.6mm tubular steel frame, integrated in moulded high resilience foam and covered with leatherette / leather / fabric.
- Maintenance-free tip-up seat with counterweight systems and being lift-up by means of gravity using Round Pivot mechanism.

Armrests and Panel

- Fixed armrest with high resilience foam upholstered in leatherette / leather / fabric.
- Wooden panel covered with foam, upholstered in leatherette / leather / fabric with a built-in cup holder.

Legs

- Legs are of lateral design made of a rectangular hollow section of 76mm x 38mm x 2.3mm Thk, continuously welded to 8mm thickness steel plate.

Metal Finishing

- All metal parts exposed shall be stripped and cleaned with iron phosphate, hot water rinsed and then chromic acid rinsed.
- All metal parts are coated with an epoxy finish minimum of 60 microns for outdoor use.

Fire Resistance

- Flammability compliance with California Bulletin 117 and international regulations in their last issues and particularly with safety regulations.
- Other regulations such as EN 1021, BS 7176, BS 5852 upon request.

Warranty

- Refer to Ferco product warranty.

Options

- Single seat / Linked seat
- Rectangular seat number
- Row letter
- Embroidery Logo
- Embroidery seat number